

About the Reference AM 1.5 Spectra

American Society for Testing and Materials (ASTM) Terrestrial Reference Spectra for Photovoltaic Performance Evaluation

The photovoltaic (PV) industry, in conjunction with the [American Society for Testing and Materials \(ASTM\)](http://www.astm.org/) (<http://www.astm.org/>) and government research and development laboratories developed and defines two, and only two, standard terrestrial solar spectral irradiance distributions. The two spectra define a standard direct normal spectral irradiance and a standard total (global, hemispherical, within 2-pi steradian field of view of the tilted plane) spectral irradiance. The direct normal spectrum is the direct component contributing to the total global (hemispherical) spectrum. The current Standard Reference Spectra are both incorporated into a single document, [ASTM G-173-03](#).

HISTORICAL NOTE : The reference spectra were first generated as separate standards, designated as E-891-82 and E-892-82 (for direct normal and global tilt, respectively.) As of June, 1999, ASTM Subcommittee G3.09 combined these two documents into a single standard "[Standard Tables for Reference Solar Spectral Irradiance at Air Mass 1.5: Direct Normal and Hemispherical for a 37 Degree Tilted Surface](#)". The relevant international standard is [ISO 9845-1, 1992](#), based solely upon both E891 and E892. In January of 2003, the G159 standard was REVISED extensively, and REPLACED with G173-03. The older standards E-891, E-892, and G159 are WITHDRAWN and NO LONGER AVAILABLE except as historical standards. Downloads are provided here for reference and comparison with the new G173 spectra.

The ASTM G173 spectra represent terrestrial solar spectral irradiance on a surface of specified orientation under one and only one set of specified atmospheric conditions. These distributions of power (watts per square meter per nanometer of bandwidth) as a function of wavelength provide a single common reference for evaluating spectrally selective PV materials with respect to performance measured under varying natural and artificial sources of light with various spectral distributions. The conditions selected were considered to be a reasonable average for the 48 contiguous states of the United States of America (U.S.A.) over a period of one year. The tilt angle selected is approximately the average latitude for the contiguous U.S.A.

The receiving surface is defined in the standards as an inclined plane at 37° tilt toward the equator, facing the sun (i.e., the surface normal points to the sun, at an elevation of 41.81° above the horizon)

The specified atmospheric conditions are:

- a) the [1976 U.S. Standard Atmosphere](#)^b with temperature, pressure, aerosol density (rural aerosol loading), air density, molecular species density specified in 33 layers
- b) an absolute air mass of 1.5 (solar zenith angle 48.19°s)
- c) Angstrom turbidity (base e) at 500 nm of 0.084^e

- d) total column water vapor equivalent of 1.42 cm
- e) total column ozone equivalent of 0.34 cm
- f) surface spectral albedo (reflectivity) of Light Soil as documented in the Jet Propulsion Laboratory [ASTER Spectral Reflectance Database](#) (<http://speclib.jpl.nasa.gov>.)

(See description of US standard atmosphere at http://nssdc.gsfc.nasa.gov/space/model/atmos/us_standard.html.)

The spectra are modeled using the SMARTS2 (version 2.9.2) Simple Model for Atmospheric Transmission of Sunshine of Gueymard (See [Gueymard, 2001](#) and [Gueymard, 2003](#)).


The [air mass zero \(AM0\), or extraterrestrial spectrum](#) used to generate the current terrestrial reference spectra was developed by Gueymard, and is a synthesis of several AM0 data sets (See [Gueymard, 2004](#) for an historical perspective.) Note the AM) spectrum used in conjunction with SMARTS to produce the reference spectra is NOT the AM0 spectrum in ASTM E-490-99, as there are slight differences in bandpass and spectral resolution for the two spectra. (See our pages on the AM0 spectra at <http://rredc.nrel.gov/solar/spectra/am0>.)

The fields in the table [Direct and Global 37 Deg Tilt: ASTM G-173](#) are wavelength in nanometers (nm), the (Gueymard 2002) extraterrestrial spectral irradiance, Direct Normal Spectral Irradiance in W/sm/nm, and the Global Total Spectral Irradiance, (W/sm/nm) on the 37° sun facing tilted surface for the atmospheric conditions specified above:

To convert nanometers to μm , divide by 1000. To convert W/sm/nm to W/sm/ μm , multiply by 1000.

A plot of the two distributions is shown here:

ASTM G173-03 Reference Spectra

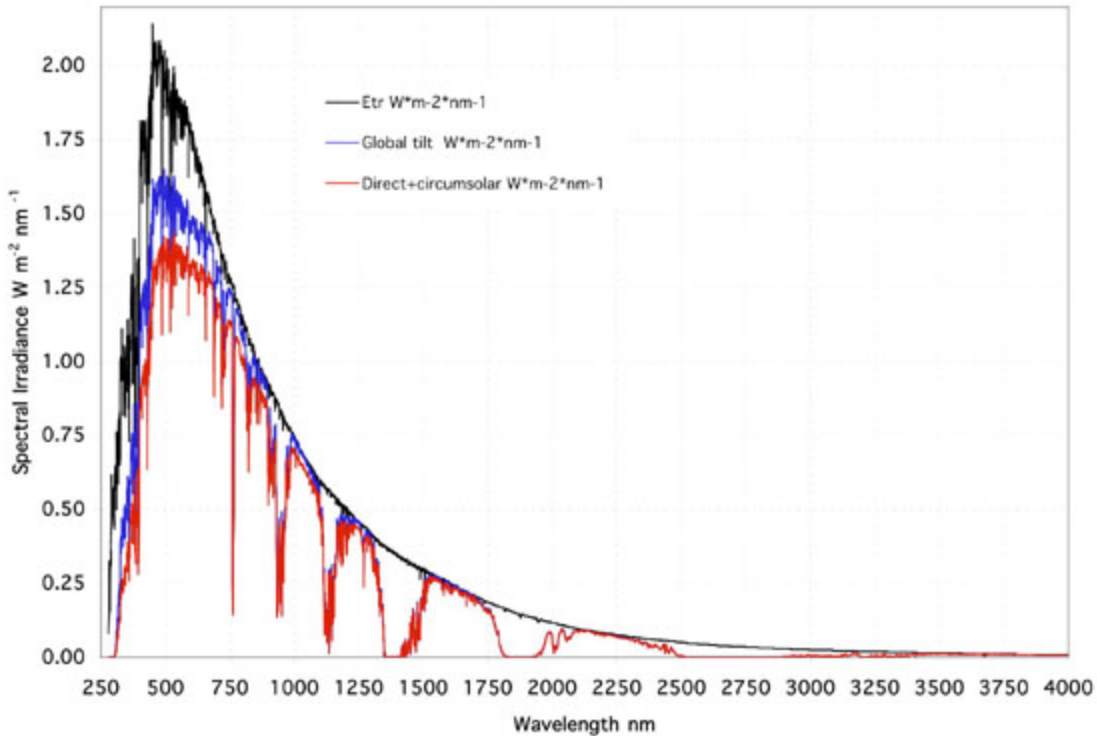

REFERENCES

Collins, D.G., and W.G. Blattner, M.B. Wells, H.G. Horak "Backward Monte Carlo Calculations of Polarization Characteristics of the Radiation Emerging from Spherical Shell Atmospheres", Applied Optics, Vol 11, Nov 1972 pp.2684-2696]

Bird, R.E. and R.L. Hulstrom, L.J. Lewis, "Terrestrial Solar Spectral Data Sets", Solar Energy, Vol 30, 1983 p 563.

Gueymard, C. Parameterized transmittance model for direct beam and circumsolar spectral irradiance, Solar Energy, Volume 71, Issue 5, November 2001, Pages 325-346.

Gueymard, C.; Myers, D.; Emery, K. Proposed reference irradiance spectra for solar energy systems testing, Solar Energy, Volume 73, Issue 6, December 2002, Pages 443-467.

Gueymard, C. The sun's total and spectral irradiance for solar energy applications and solar radiation models, Solar Energy, Volume 76, Issue 4, April 2004, Pages 423-453.

Kurtz, S. R.; Myers, D.; Townsend, T.; Whitaker, C.; Maish, A.; Hulstrom, R.; Emery, K. Outdoor Rating Conditions for Photovoltaic Modules and Systems. *Solar Energy Materials*, 2000, vol 62 #4. pp. 379-391. See also NREL Report No. JA-520-27160.

Myers, D. R.; Kurtz, S. R.; Whitaker, C.; Townsend, T. (2000). Preliminary Investigations of Outdoor Meteorological Broadband and Spectral Conditions for Evaluating Photovoltaic Modules and Systems. Program and Proceedings: NCPV Program Review Meeting 2000, 16-19 April 2000, Denver, Colorado. BK-520-28064. Golden, CO: National Renewable Energy Laboratory; pp. 69-70; NREL Report No. CP-560-28187.

Myers, D. R.; Kurtz, S. R.; Emery, K.; Whitaker, C.; Townsend, T. (2000). Outdoor Meteorological Broadband and Spectral Conditions for Evaluating Photovoltaic Modules. Conference Record of the Twenty-Eighth IEEE Photovoltaic Specialists Conference--2000, 15-22 September 2000, Anchorage, Alaska. Piscataway, NJ: Institute of Electrical and Electronics Engineers, Inc.; pp. 1202-1205; NREL Report No. CP-520-28860.

United States Committee on Extension to the Standard Atmosphere, "U.S. Standard Atmosphere, 1962: ICAO extension to 32 kilometers. Committee on Extension to the Standard Atmosphere". U.S. Government Printing Office, Washington, D.C., 1962

NOTES

^a To obtain a copy of ISO 9845-1, 1992 contact the [International Organization for Standardization \(ISO\)](http://www.iso.ch/) at <http://www.iso.ch/>.

^b The 1976 US Standard atmosphere used in the production of the modeled spectra:

United States Committee on Extension to the Standard Atmosphere, "U.S. Standard Atmosphere, 1976", National Oceanic and Atmospheric Administration, National Aeronautics and Space Administration, United States Air Force, Washington D.C., 1976.

^c The 0.084 aerosol optical depth (AOD) selected for the G173 Standard is based upon study of the correlation between Direct Beam and 1000 W/m² Global Tilted broadband data in the Southwest U.S. (chosen as a likely deployment area for concentrating photovoltaic collectors.) (See [Myers, et al., 2000a](#); [Myers, et al., 2000b](#).)

For more information contact Keith Emery at keith_emery@nrel.gov, or Daryl Myers at daryl_myers@nrel.gov.